


PLS-QMS-D250

Insulated Mult Tap Connectors D 250 Standard Entry



QMS-D250-1

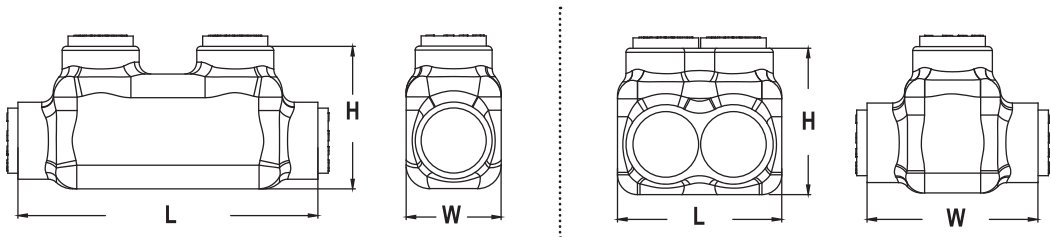

QMS-D250-2



QMS-D250-3



QMS-D250-4

Model No		QMS-D250-1	QMS-D250-2	QMS-D250-3	QMS-D250-4
AWG Range		6AWG-250kcmil	6AWG-250kcmil	6AWG-250kcmil	6AWG-250kcmil
Conductor Type		Both Aluminum and Copper			
Body Material		6061-T6 Aluminum			
Number of wires connected		One Wire Per Terminal			
Strip Length(In.)		1.756	1.752	1.752	1.752
Insulating Sleeve		PVC			
Size (In.)	L	3.98	2.17	3.07	3.98
	W	1.26	2.29	2.29	2.29
	H	1.94	1.91	2.45	1.91
ambient temperature		-10°C -90°C			
Voltage withstand		2500Vac/1Min			