


PLS-QMS-D2/0

Insulated Mult Tap Connectors D 2/0-6 AWG

Standard Entry

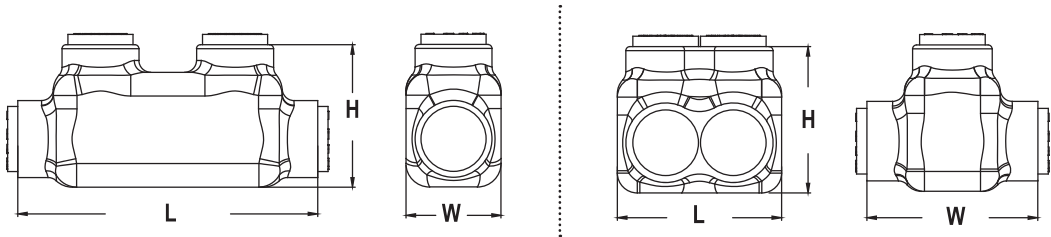

QMS-D2/0-1



QMS-D2/0-2



QMS-D2/0-3



QMS-D2/0-4

Model No		QMS-D2/0-1	QMS-D2/0-2	QMS-D2/0-3	QMS-D2/0-4
AWG Range		2/0-6AWG	2/0-6AWG	2/0-6AWG	2/0-6AWG
Conductor Type		Both Aluminum and Copper			
Body Material		6061-T6 Aluminum			
Number of wires connected		One Wire Per Terminal			
Strip Length(In.)		0.472	0.472	1.291	1.291
Insulating Sleeve		PVC			
Size (In.)	L	3.15	1.65	2.32	2.99
	W	0.99	1.71	1.71	1.71
	H	1.36	1.52	1.52	1.52
ambient temperature		-10°C -90°C			
Voltage withstand		2500Vac/1Min			