


| Specification | | BRP/QD-SJ-12-A/0 | |
|---|--|----------------------------|---------------|
| Product Name | A+C USB Charger with 20A Tamper Resistant Receptacle | | |
| Models | PLS-BAA-015D | | |
| Appearance | | | |
| Description | 1.Smart System: Built-in smart chip recognizes the individual device’s charging requirement to optimize the charge. | | |
| | 2.Safety:Fireproof housing and high-quality components for long service life. | | |
| | 3.Unique 2 USB Ports:Charges two USB devices without adapters.There is a reversible Type C USB port for the increasingly popular electronic devices trend. | | |
| | 4.Tamper resistant(TR):TR design increases the electrical safety level by preventing the attempting to insert objects in to the outlet or open the plate. | | |
| Size & Color | Size | 105*43*45mm | |
| | Color | Cover:White (Customizable) | |
| | | Base:Black(Customizable) | |
| Material & Surface treatment | Enclosure | PC | |
| | Terminal | Copper alloy | Acid pickling |
| | Mounting Yoke | Zinc plated steel | |
| Weight | 115g | | |
| Certification | cULus | | |
| Standard(s) | UL 498&CSA C22.2 No. 42-10 | | |
| Technical parameter | Receptacle Rating:125V、 60Hz、 20A | | |
| | USB Rating:5VDC、 4.8A | | |
| | Dielectric Voltage Withstand:1.25KV/1min | | |

Flame Classifications:UL94-V2

Wire:12-14AWG

**Dimension &
Assembly
drawing**

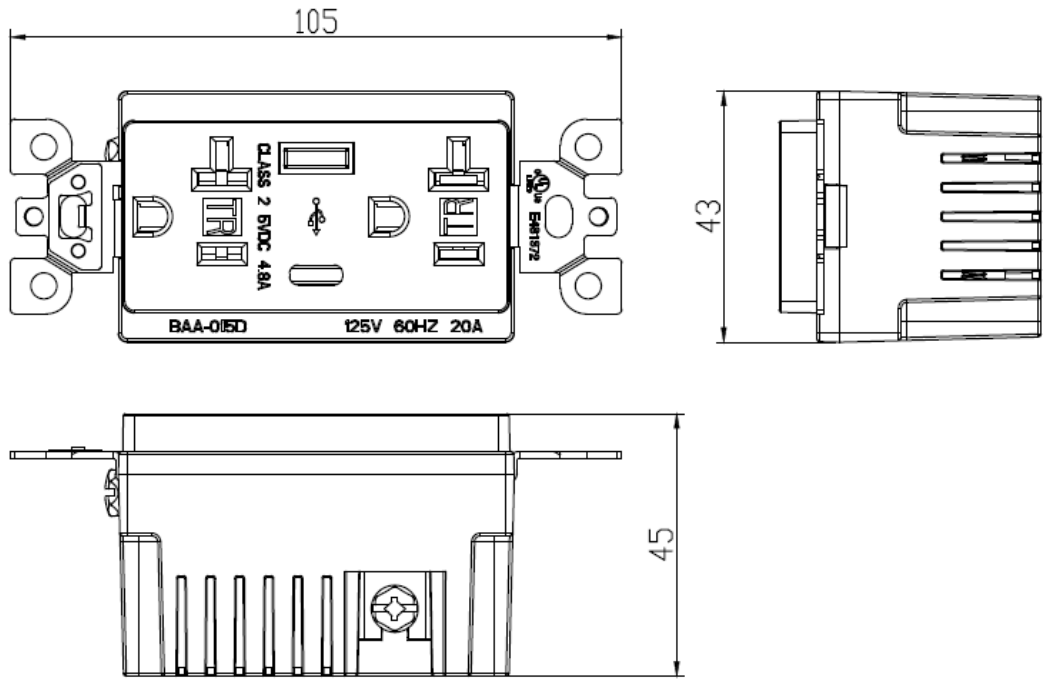

Compiled/Date:

Checked/date:

Approved/date: