

**Specification**
**BRP/QD-SJ-12-A/0**

<b>Product Name</b>	15 Amp GFCI Receptacle(Weather Resistant、TR)		
<b>Models</b>	PLS-YGB-094WR		
<b>Appearance</b>			
<b>Description</b>	<p>1. Constructed with premium high-impact resistant thermoplastic materials and rational structure design, ensures superior strength and durability.</p> <p>2. Two Indicator Light provides simple, intuitive feedback on power and protection status. If the indicator (LED) glows green, you have installed the GFCI receptacle correctly and it is working properly. The GFCI outlet automatically conducts a Self-Test(the red light will blink once) every 40 seconds to ensure the GFCI is continually working. When the GFCI receptacle reaches the end of its' life the red indicator will turn on, it reminds you to replace the outlet in time.</p> <p>3. Weather Resistant - enhanced corrosion resistant components to withstand more moist or humid location.</p> <p>4. Tamper resistant(TR) -- TR design increases the electrical safety level by preventing the attempting to insert objects in to the outlet or open the plate.</p> <p>5. Provides continuous ground fault protection - detects and trips on actual ground fault even when self-test is being conducted.</p>		
<b>Size &amp; Color</b>	Size	105*42.8*40.7mm	
	Color	Cover:White(Customizable) Base:Black(Customizable)	
<b>Material &amp; Surface treatment</b>	Enclosure	PC	
	Terminal	Copper alloy	Acid pickling
	Mounting Yoke	Zinc plated steel	
<b>Weight</b>	123g		
<b>Certification</b>	cULus		
<b>Standard(s)</b>	UL498/UL943/CSA C22.2 No.144.1		

Receptacle Rating:15A/125Vac

Dielectric Voltage Withstand:1500V(AC)

Mechanical life: 6000 times

Flame class: UL-94 V2

Trip threshold: 5mA

Trip time: < 25mS

Insertion force: < 178N


Release force: < 67N

Retention force: > 13N

Wires:12-14AWG

### Technical parameter

### Dimension & Assembly drawing

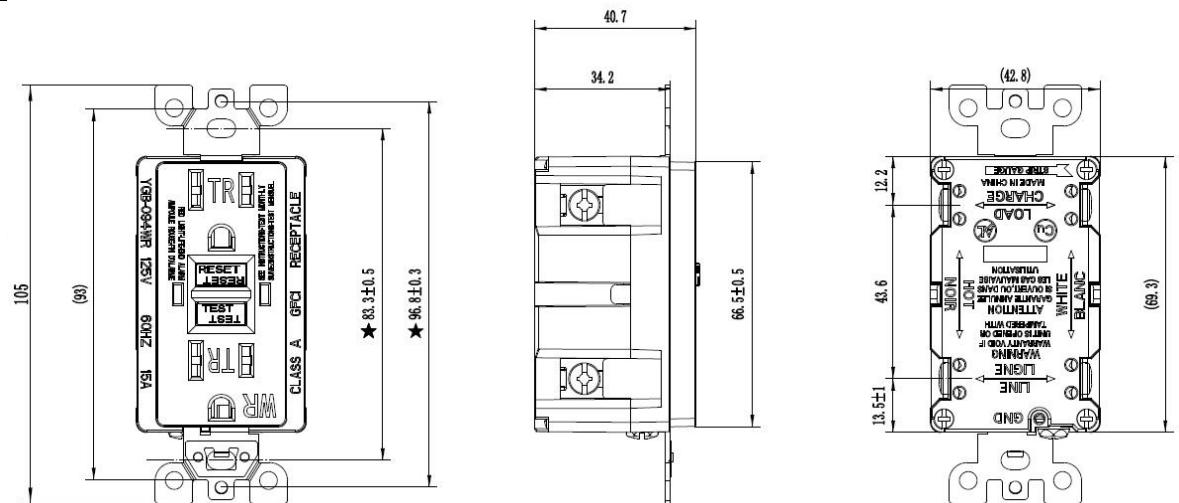

Compiled/Date:

Checked/date:

Approved/date:



3187 South Alameda St., Vernon CA 90058

(213) 247-5999

info@pureliteinc.com