


# PLS-QMS-D500

Insulated Mult Tap Connectors D 500 Series Entry



QMS-D500-1

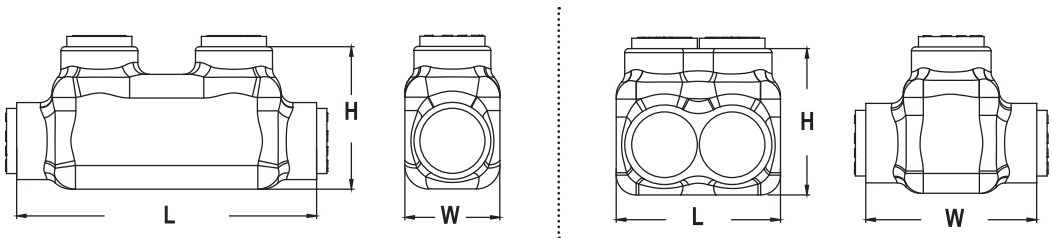

QMS-D500-2



QMS-D500-3



QMS-D500-4

Model No	QMS-D500-1	QMS-D500-2	QMS-D500-3	QMS-D500-4	
<b>AWG Range</b>	4AWG-500kcmil	4AWG-500kcmil	4AWG-500kcmil	4AWG-500kcmil	
<b>Conductor Type</b>	Both Aluminum and Copper				
<b>Body Material</b>	6061-T6 Aluminum				
<b>Number of wires connected</b>	One Wire Per Terminal				
<b>Strip Length(In.)</b>	2.402	2.472	2.472	2.472	
<b>Insulating Sleeve</b>	PVC				
<b>Size (In.)</b>	<b>L</b>	5.15	2.82	4	5.18
	<b>W</b>	1.65	2.84	2.84	2.85
	<b>H</b>	2.75	2.58	2.58	2.58
<b>ambient temperature</b>	-10°C -90°C				
<b>Voltage withstand</b>	2500Vac/1Min				