





PLS-QMS-D3/0

Insulated Mult Tap Connectors D

ided Entry

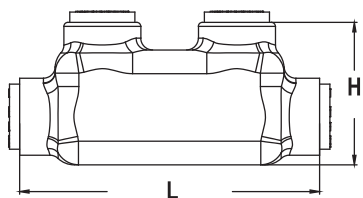

QMS-D3/0-1



QMS-D3/0-2



QMS-D3/0-3



QMS-D3/0-4

Model No		QMS-D3/0-1	QMS-D3/0-2	QMS-D3/0-3	QMS-D3/0-4
AWG Range		3/0-6AWG	3/0-6AWG	3/0-6AWG	3/0-6AWG
Conductor Type		Both Aluminum and Copper			
Body Material		6061-T6 Aluminum			
Number of wires connected		One Wire Per Terminal			
Strip Length(In.)		1.732	1.394	1.732	1.732
Insulating Sleeve		PVC			
Size (In.)	L	3.46	1.82	2.57	3.32
	W	1.6	1.87	1.87	1.87
	H	1.67	1.61	1.61	1.61
ambient temperature		-10°C -90°C			
Voltage withstand		2500Vac/1Min			